Einhorn Yaffee Prescott
Architecture & Engineering, P.C.
1000 Potomac Street, NW
Washington, D.C. 20007
Telephone: 202.471.5000
Fax: 202.471.5050

eypae.com

EYP/

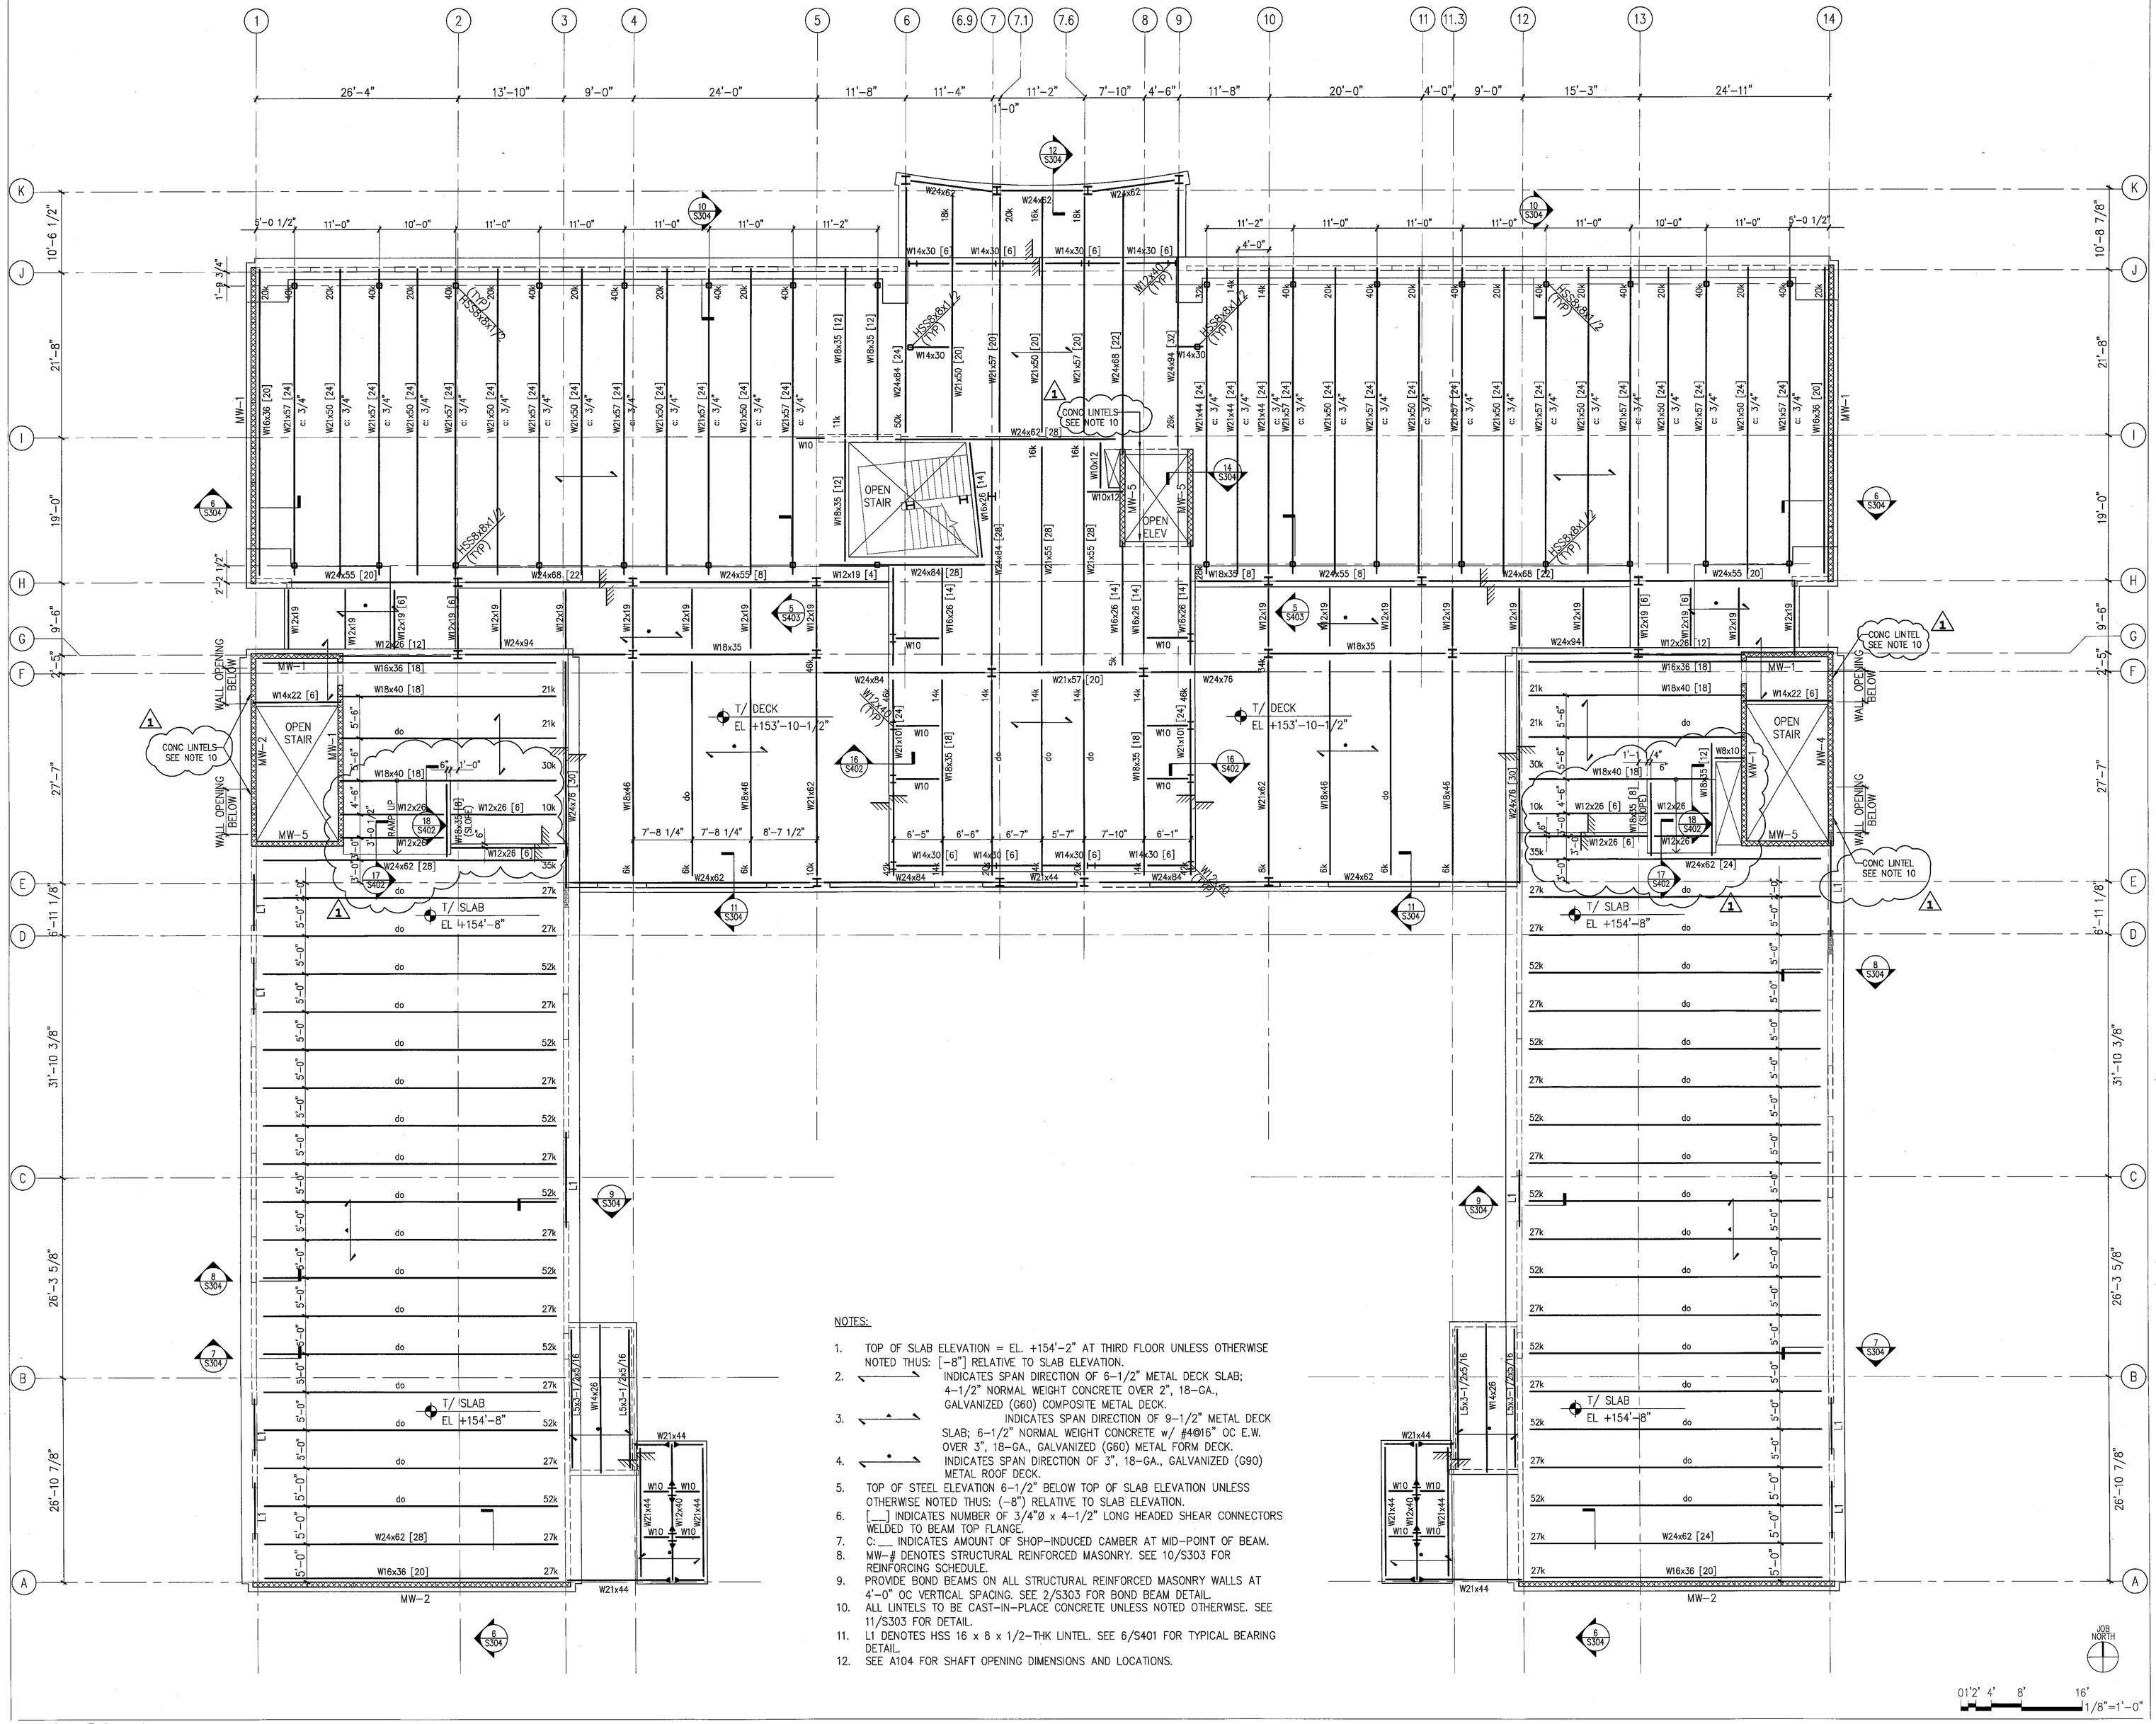

NOTES:

1. TOP OF SLAB ELEVATION = EL. +154'-2" AT THIRD FLOOR UNLESS OTHERWISE NOTED THUS: [-8"] RELATIVE TO SLAB ELEVATION.
2. INDICATES SPAN DIRECTION OF 6-1/2" METAL DECK SLAB; 4-1/2" NORMAL WEIGHT CONCRETE OVER 2", 18-GA., GALVANIZED (G60) COMPOSITE METAL DECK.
3. INDICATES SPAN DIRECTION OF 9-1/2" METAL DECK SLAB; 6-1/2" NORMAL WEIGHT CONCRETE w/ #4@16" OC E.W. OVER 3", 18-GA., GALVANIZED (G60) METAL FORM DECK.
4. INDICATES SPAN DIRECTION OF 3", 18-GA., GALVANIZED (G90) METAL ROOF DECK.
5. TOP OF STEEL ELEVATION 6-1/2" BELOW TOP OF SLAB ELEVATION UNLESS OTHERWISE NOTED THUS: (-8") RELATIVE TO SLAB ELEVATION.
6. [___] INDICATES NUMBER OF 3/4"Ø x 4-1/2" LONG HEADED SHEAR CONNECTORS WELDED TO BEAM TOP FLANGE.
7. C: ___ INDICATES AMOUNT OF SHOP-INDUCED CAMBER AT MID-POINT OF BEAM.
8. MW-# DENOTES STRUCTURAL REINFORCED MASONRY. SEE 10/S303 FOR REINFORCING SCHEDULE.
9. PROVIDE BOND BEAMS ON ALL STRUCTURAL REINFORCED MASONRY WALLS AT 4'-0" OC VERTICAL SPACING. SEE 2/S303 FOR BOND BEAM DETAIL.
10. ALL LINTELS TO BE CAST-IN-PLACE CONCRETE UNLESS NOTED OTHERWISE. SEE 11/S303 FOR DETAIL.
11. L1 DENOTES HSS 16 x 8 x 1/2-THK LINTEL. SEE 6/S401 FOR TYPICAL BEARING DETAIL.
12. SEE A104 FOR SHAFT OPENING DIMENSIONS AND LOCATIONS.

KEY PLAN:

TRUE NORTH / JOB NORTH

NO.	REVISION/SUBMISSION	DATE
1	ADDENDUM #3	4.1.2008

THE COLLEGE OF NEW JERSEY

New Art & IMM Building

Ewing, New Jersey

DATE:	
SCALE:	1/8" = 1'-0"
EYP PROJECT NO.	1006041.01
DESIGNED BY:	APT, AL
DRAWN BY:	APT
CHECKED BY:	FDL

FRANKLIN D. HALLORAN-LANCASTER
NJ PROFESSIONAL ENGINEER
LICENSE NO. GE044857

Structural Framing Plan - Third Floor

S104

© 2007 Einhorn Yaffee Prescott, A&E